



04/04/00

BOX PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

4-5-00

A

Attorney Docket No. LIT-PI-499

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of:

Inventor(s): Matthew O. Anderson, W. David Willis and Robert A. Kinoshita

For (title): Systems and Methods for Improved Telepresence

Enclosed are:

- ☒ 3 sheets of drawing(s). ☐ informal ☐ formal
☒ An assignment of the invention to Bechtel BWTX Idaho, LLC
☐ A certified copy of a _____ application.
☐ An associate power of attorney.
☒ Combined Declaration and Power of Attorney.
☐ Information Disclosure Statement.
☐ Form PTO-1449 (together with citations).

Fee Calculation (37 CFR 1.16)

CLAIMS AS FILED

NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE \$690.00
Total Claims (37 CFR 1.16(c)) 36-20=	16	X \$18.00	288
Independent Claims (37 CFR 1.16(b)) 4-3=	1	X \$78.00	78
Multiple dependent claim(s), if any (37 CFR 1.16(d))		\$260.00	= 0
			TOTAL \$ 1056.00

- ☒ Please charge Deposit Account No. 05-0565 in the amount of \$ 1056.00.
 A duplicate copy of this sheet is attached.
☐ A check in the amount of \$ _____ to cover the filing fee is enclosed.
☐ A check for \$ _____ is enclosed to cover the assignment recordation fee.
☒ The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. 05-0565:
☒ Any additional filing fees required under 37 CFR 1.16(a), (f) or (g) (filing fees).
☒ Any additional filing fees required under 37 CFR 1.16(b), (c) and (d) presentation of extra claims.)
☐ Any additional filing fees required under 37 CFR 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application).
☐ Any patent application processing fees under 37 CFR 1.17.
☐ The issue fee set in 37 CFR 1.18 (at or before mailing of Notice of Allowance, pursuant to 37 CFR 1.311(b)).

SIGNATURE OF ATTORNEY

W. Gary Goodson
Reg. No. 22.387P. O. Box 1625
Idaho Falls, ID 83415-3899
(208) 526-9469jc542 U.S. PTO
09/542973
04/04/00

004040 "C" 0524560

April 4, 2000

CCN 00-007071

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

LIT-PI-499, "SYSTEMS AND METHODS FOR IMPROVED TELEPRESENCE"

Dear Sir:

Enclosed is the subject patent application, 3 sheets of drawings, together with an executed Combined Declaration and Power of Attorney; a Patent Assignment, together with a Recordation Form Cover Sheet; a fee sheet, in duplicate; and a return receipt postcard.

Sincerely,



Patricia A. Butikofer
Intellectual Property Administrator
Technology Transfer Office

PB

Enclosures

cc: R. J. Fisher, DOE-CH (w/o Encl)

0044990 "C" 05 24 50

Express Mail #EI568916213US

Atty. Dkt. No.: LIT-PI-499

Title: SYSTEMS AND METHODS FOR IMPROVED TELEPRESENCE

**Inventors: Matthew O. Anderson
 W. David Willis
 Robert A. Kinoshita**

0040340 "C" 624350

1 **SYSTEMS AND METHODS FOR IMPROVED TELEPRESENCE**

2

3 **CONTRACTUAL ORIGIN OF THE INVENTION**

4 This invention was made with United States Government support under Contract

5 No. DE-AC07-94ID13223, now Contract No. DE-AC07-99ID13727 awarded by the

6 United States Department of Energy. The United States Government has certain rights in

7 the invention.

8 **RELATED APPLICATION**

9 This application claims priority from United States provisional application S/N

10 60/127,826 filed April 5, 1999, which is hereby incorporated by reference.

11

12 **BACKGROUND OF THE INVENTION**

13 **Field of the Invention**

14 The present invention relates generally to remotely controlled robotic systems

15 incorporating telepresence. More particularly, the present invention relates to

16 telepresence systems capable of providing continuous three dimension zooming

17 capability.

18

19 **Present State of the Art**

20 Robotic systems are progressively being implemented as solutions to problems

21 existing in a wide variety of situations and environments. Some of those environments,

22 such as nuclear reactors, are hazardous to humans and the use of robotic systems prevents

1 humans from being unnecessarily exposed to those hazardous conditions. Other
2 environments and situations that may benefit from the use of robotic systems or devices
3 include medical procedures, underwater activities, and security or surveillance systems.

4 The ability to remotely control robots or robotic systems is becoming more
5 difficult and complex as the robotic systems become more sophisticated and intricate.

6 The complexity arises from the number of tasks that a robotic system may perform as
7 well as the controls that are needed cause the robotic system to perform those tasks.

8 Frequently, operators of remote robotic systems have a need to easily and accurately view
9 the operating environment of the robotic system as well as the objects that are being
10 manipulated by the robotic system. In particular, the ability to display depth is greatly
11 beneficial to remote operators, especially when sensitive objects are being manipulated
12 and handled by the robotic system.

13 A potential solution to this problem is to permit the robotic system to be
14 controlled by more than one remote operator. The number of controls assigned to each
15 operator may be reduced, but other problems can arise which are related to the interaction
16 of the operators. Frequently, the actions of the operators must be coordinated to produce
17 a particular result. However, the operators are often separated from one another and are
18 often controlling other devices that also require their attention and focus. As a result, the
19 operators are unable to effectively communicate with one another and the performance of
20 the robotic system is reduced.

21 Other attempts to resolve this problem have incorporated video cameras either
22 attached to the robotic system or placed within the operating environment of the robotic

1 system to provide a telepresence. However, if the camera is a singular unit, the remote
 2 operator is unable to perceive depth. The lack of depth perception can lead to serious
 3 complications, especially in the case of nuclear reactors. For example, a robotic system
 4 may be used to seal hazardous materials in an appropriate container. In this case, the
 5 operator must be able to simultaneously view the hazardous material by maneuvering a
 6 camera, cause the robotic system to grasp the hazardous material, place the hazardous
 7 material in the container, and seal the hazardous material in the container.

8 Performing these functions is difficult and slow for several reasons. First, the
 9 operator is using more than one device to control both the robotic system and the camera.
 10 Second, the camera may not provide stereo vision and the operator is unable to perceive
 11 depth. If the camera is capable of providing stereo vision, the camera is typically not
 12 capable of providing continuous stereo zooming functions. Cameras capable of providing
 13 continuous stereo zooming functions require additional controls that simply add to the
 14 existing controls. Furthermore, this additional complexity taxes the ability of the remote
 15 operator to efficiently operate the robotic system.

16 In addition, many robotic systems provide a wide variety of hardware devices for
 17 performing various tasks, and it is often difficult for an operator to switch control to
 18 different devices. What is needed are systems and methods that permit an operator to
 19 more easily control a robotic system having telepresence including stereo zooming
 20 capabilities as well as systems and methods for allowing an operator to easily reconfigure
 21 the hardware devices that are being controlled by the remote operator.
 22

004040 "E 2624560

1 SUMMARY OF THE INVENTION

2 A telepresence system provides a remote operator the ability to view an operating
3 environment. One embodiment of the present invention provides a hands free intuitive
4 interface that allows an operator of a remote robotic or telepresence system to concentrate
5 on the tasks at hand. The present invention minimizes the complexity of remote stereo
6 vision controls and provides an operator with an accurate view of the operating
7 environment, including depth perception. The interface of the telepresence system and
8 the operator is simplified to provide a modular, reconfigurable system.

9 In order to provide telepresence, it is often necessary to convert user commands
10 into device motion. Many of the devices on a robotic or telepresence system, including
11 robots, cameras, zoom lenses, slider bars, and the like must often be repositioned, focused
12 or otherwise moved. The present invention defines a generalized zone structure that is
13 translated to device movement. The zones correspond generally to the various axes or
14 directions that a device may move. A slider bar, for example may move along a single
15 axes, while a pan and tilt device may move along multiple axes. The zones are defined
16 such that direction and speed may be inferred from the value of the zones.

17 The commands are usually received from input devices and the present invention
18 translates the raw data provided by the input devices into a zone structure that is
19 understood by the potential telepresence devices. Telepresence devices only respond to
20 the zones that affect them. Thus, a slider bar will only respond to data in a particular
21 zone and will ignore the information that may be contained in other zones. Because the
22 raw data of the input devices is converted to a zone structure, any input device is easily

capable of controlling any telepresence device. In fact, it is possible for a single input device to control multiple telepresence devices.

The telepresence system is further modularized by providing the ability to define multiple views or states. Each view defines an input device and the telepresence devices that are to be controlled by that input device. Depending on the needs of the operator, the operator may issue, for example, a verbal command to change views. One advantage of this modularity is that an operator may use a single device to control a wide variety of telepresence devices. The modularity also allows additional input devices and telepresence devices to be easily and quickly adapted to the systems of the present invention.

Additional features and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by the practice of the invention. The features and advantages of the invention may be realized and obtained by means of the instruments and combinations particularly pointed out in the appended claims. These and other features of the present invention will become more fully apparent from the following description and appended claims, or may be learned by the practice of the invention as set forth hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that the manner in which the above-recited and other advantages and objects of the invention are obtained, a more particular description of the invention briefly described above will be rendered by reference to specific embodiments thereof

004049 "E" 64550

1 which are illustrated in the appended drawings. Understanding that these drawings depict
2 only typical embodiments of the invention and are not therefore to be considered to be
3 limiting of its scope, the invention will be described and explained with additional
4 specificity and detail through the use of the accompanying drawings in which:

5 Figure 1 is a block diagram generally illustrating an exemplary telepresence
6 system;

7 Figure 2 is a more detailed block diagram of an exemplary telepresence system;
8 and

9 Figure 3 is a block diagram illustrating the concept of generalized zones for
10 controlling a telepresence system.

11
12 **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

13 Telepresence systems generally refer to systems that allow one or more operators
14 to visually perceive a remote operating environment. Frequently, the operators are unable
15 to physically view the operating environment and therefore rely on the telepresence
16 system to provide an accurate representation of the operating environment. An accurate
17 representation of the operating environment allows the remote operators to more
18 effectively carry out their objectives. For example, the ability to defuse an explosive
19 device using a remotely controlled a robot is greatly enhanced if the operator is able to
20 accurately perceive the both explosive device and the environment of the explosive
21 device.

As previously described, providing an operator with an accurate view of the operating environment requires an operator to interact with an excessive number of controls. The present invention alleviates the complexity of operating a sophisticated robotic system including telepresence devices in part by implementing control techniques that enable an operator to control certain aspects of the robotic and telepresence system in a non-conventional yet intuitive manner. For example, it is often desirable for a remote operator to adjust a camera view while manipulating a robotic arm or gripper and one embodiment of the present invention allows the operator to employ a headset to control the movement of the camera while allowing the operator's hands to use a joystick to control the robotic arm or gripper. In this manner, the complexity of the controls is effectively reduced because the operator is able to intuitively control the camera as the operator's head movements are translated into camera movement and the operator's hands are free to perform other tasks.

The present invention extends both methods and systems for controlling telepresence and robotic systems. The embodiments of the present invention may comprise a special purpose or general purpose computer including various computer hardware. Embodiments within the scope of the present invention also include computer-readable media for carrying or having computer-executable instructions or data structures stored thereon. Such computer-readable media can be any available media which can be accessed by a general purpose or special purpose computer. By way of example, and not limitation, such computer-readable media can comprise RAM, ROM, EPROM, CD-ROM or other optical disk storage, magnetic disk storage or other magnetic storage devices, or

1 any other medium which can be used to carry or store desired program code means in the
2 form of computer-executable instructions or data structures and which can be accessed by
3 a general purpose or special purpose computer. When information is transferred or
4 provided over a network or another communications connection (either hardwired,
5 wireless, or a combination of hardwired or wireless) to a computer, the computer properly
6 views the connection as a computer-readable medium. Thus, any such a connection is
7 properly termed a computer-readable medium. Combinations of the above should also
8 be included within the scope of computer-readable media. Computer-executable
9 instructions comprise, for example, instructions and data which cause a general purpose
10 computer, special purpose computer, or special purpose processing device to perform a
11 certain function or group of functions.

12 The following discussion are intended to provide a brief, general description of a
13 suitable computing environment in which the invention may be implemented. Although
14 not required, the invention will be described in the general context of computer-
15 executable instructions, such as program modules, being executed by computers in
16 network environments. Generally, program modules include routines, programs, objects,
17 components, data structures, etc. that perform particular tasks or implement particular
18 abstract data types. Computer-executable instructions, associated data structures, and
19 program modules represent examples of the program code means for executing steps of
20 the methods disclosed herein. The particular sequence of such executable instructions or
21 associated data structures represent examples of corresponding acts for implementing the
22 functions described in such steps.

Those skilled in the art will appreciate that the invention may be practiced in network computing environments with many types of computer system configurations, including personal computers, hand-held devices, multi-processor systems, microprocessor-based or programmable consumer electronics, network PCs, minicomputers, mainframe computers, and the like. The invention may also be practiced in distributed computing environments where tasks are performed by local and remote processing devices that are linked (either by hardwired links, wireless links, or by a combination of hardwired or wireless links) through a communications network. In a distributed computing environment, program modules may be located in both local and remote memory storage devices.

Figure 1 is a block diagram illustrating an exemplary telepresence or robotic system illustrated generally as telepresence system 10. Telepresence control 20 communicates with telepresence devices 60 via communication link 40. Communication link 40 is representative of systems and methods that permit communication to occur between telepresence control 20 and telepresence devices 60. Communication link 40 includes, but is not limited to, wireless communication including radio modems and the like as well as physical communication apparatus such as cables and the like. In the case of wireless communication, communication link 40 may comprise a receiver and transmitter at both telepresence control 20 and telepresence devices 60. Communication link 40 may also comprise any means for permitting communication between telepresence control 20 and telepresence devices 60.

1 The telepresence control 20 is the portion of telepresence system 10 that receives
2 input from an operator through one or more input devices. The input or commands
3 supplied by the operator are transmitted over the communication link 40 to the
4 telepresence devices 60. The telepresence devices 60 may include one or more hardware
5 modules or devices that are capable of being controlled by the operator commands. The
6 operator is also capable of responding to feedback supplied by the telepresence devices
7 60.

8 Figure 2 is a more detailed block diagram illustrating potential configurations of
9 telepresence control 20 and telepresence devices 60. In one embodiment, the
10 telepresence 20 comprises input devices 22 and a computer 30. The input devices 22 are
11 used to receive input, movement or commands from an operator that are then provided to
12 computer 30. Computer 30 processes these commands and transmits them to the
13 telepresence devices 60 via communication link 40, which may comprise a radio modem.
14 The telepresence devices 60 then execute the operator commands.

15 Exemplary input devices include, but are not limited to, a headset 24, a joystick
16 26, a mouse 38 and a keyboard 30. Exemplary telepresence devices include, but are not
17 limited to, stereo camera set 62, zoom camera 64, pan and tilt device (PTD) 66 and 68,
18 slider bar 70, and robot 72. In the illustrated embodiment, the input devices 22 receive
19 input from an operator that is effectively translated into motion by the telepresence
20 devices 60. The input is often in the form of operator movement or motion. For
21 example, the input to the headset 24 is the movement of the operator's head. In the case
22 of a zoom camera, for example, the forward and backward movement of an operator's

1 head may be interpreted as a command to cause a camera to zoom in or out.

2 Alternatively, the forward and backward movement of an operator's head could also be
3 interpreted as a command to physically move the camera either forward or backward.

4 The actual implementation can be configured as needed.

5 However, it is understood that the present invention encompasses commands that
6 are not related to the movement of the telepresence devices 60. For example,
7 telepresence devices 60 may comprise sensors for monitoring an environment. The
8 commands provided by the operator may be interpreted as command to begin recording
9 data. Other user commands may include causing the stored data to be transmitted to a
10 remote location. The illustrated embodiment of the present invention effectively isolates
11 the input devices 22 from the telepresence devices 60 such that any input device 22 can
12 be used to control any one or more of the telepresence devices 60.

13 This ability to control the motion or other aspect of a telepresence device through
14 any input device 22 is achieved in this embodiment through the use of generalized zones
15 that are described with reference to Figure 3. Figure 3 illustrates an exemplary set of
16 zones 99 which are interpreted by a computer as commands to move a telepresence
17 device in a particular direction and at a particular speed. The dead zone 100 is interpreted
18 as no motion and is present essentially to ensure that inadvertent movements are not
19 interpreted as a movement command. Thus, when an operator is using a headset, the
20 operator's head does not need to be held perfectly still and slight head movements will
21 not be interpreted as input commands. First left zone 104 is interpreted as left motion and
22 second left zone 102 is interpreted as a command to move more rapidly to the left.

Additional left zones may be implemented, but are not illustrated in Figure 3. In fact, the actual number of zones can vary and may be tailored to a specific operator. A similar analysis can be applied to forward zones 106, right zones 108 and reverse zones 110.

Figure 3 is intended to generally illustrate the concept of zones, but is not to be interpreted as limiting the number of zones that may be defined. For example, a headset can be used to interpret approximately six degrees of motion that correspond to movement in the x, y, z, pitch, roll, and yaw directions. Moving the head left and right corresponds to movement in the x direction, moving the head forward and backward corresponds to movement in the y direction, while moving the head vertically corresponds to movement in the z direction. Turning the head left and right corresponds to the yaw direction, nodding the head up and down corresponds to movement in the pitch direction and tilting the head left and right corresponds to movement in the roll direction. However, even though a particular input device such as a headset may have multiple zones, it is possible that the telepresence device implementing the movement commands received from the headset may not be able to move in corresponding directions.

With reference again to Figure 2, each input device 22 has directions of movement that correspond to the zones as described in Figure 3. The headset 24 has zones as described above, while the joystick 26, the mouse 28, and the keyboard 30 can also be associated with either the same or different zones. The number of zones is dependent on the input device. Thus the joystick 26 has some of the same zones as the headset 24, but the joystick 26 does not have all of the zones that correspond to the

1 headset 24. Alternatively, the keyboard 30 may have more zones than the headset 24
2 because each of the keys can be associated with a different zone.

3 The input commands from the input devices are received by an input conversion
4 module 34 operating at computer 30. The input conversion module 34 receives the raw
5 input from the input devices 22 and converts the raw input into a zone structure that is by
6 the computer 30 for each input device 22. The zone structure may use integers, for
7 example, to define movement in a particular direction. Positive integers correspond to
8 movement in one direction while negative integers correspond to movement in the
9 opposite direction. The magnitude of the integer is often related to the speed of
10 movement. The zone structure thus enables any input device 22 to be compatible with
11 one or more telepresence devices 60.

12 The zone structure is provided to the device modules 32, which processes the zone
13 structure and issues the appropriate movement or operator command across the
14 communication link 40 to the appropriate telepresence device. The raw data provided by
15 the input devices 24 is converted to the zone structure. In this manner, the use of the zone
16 structure, allows any input device to control any telepresence device and input devices are
17 interchangeable.

18 Even though a particular input device 22 may have many different directions and
19 zones associated with it, the device modules 32, or more specifically the telepresence
20 devices 60, only respond to the directions that concern the telepresence device being
21 controlled. For purposes of discussion, all potential directions of movement are referred
22 to as axes. For example, slider bar 70 is a device that is capable of moving along a single

1 axis. If the headset 24 is used to control the movement of the slider bar 70, then the
2 device module 32 that controls the slider bar 70 will only respond to those portions of the
3 zone structure that correspond to motion along that axis and the other portions of the zone
4 structure will be ignored for that device. On the other hand, if the headset 24 is used to
5 control the pan and tilt device (PTD) 66, which is capable of movement along multiple
6 axes, then the device module 32 controlling the pan and tilt device 66 will respond to
7 more portions of the zone structure.

8 More particularly, the input conversion module 34 and the device modules 32
9 allow any of the input devices 22 to control any of the instruments or hardware
10 component or devices comprising telepresence devices 60. In fact, it is possible for a
11 single input device to control more than one of the telepresence devices 60. For example,
12 if the headset 24 is selected as the input device and the operator desires to control the
13 zoom camera 64, it is also necessary to control the PTD 68, the camera zoom, and the
14 camera focus. The PTD 68 requires two degrees of freedom or axes: tilt and pan. When
15 operators move their heads left and right, the PTD 68 will pan the zoom camera 64 left
16 and right. When operators nod their head up and down, the PTD 68 will tilt the zoom
17 camera 64 up or down. When operators move their head either forward or backward, the
18 magnification provided by the zoom lens of the zoom camera 64 is altered accordingly.
19 The focus of the zoom camera 64 may be achieved when the headset 24 detects the
20 operator's head being turned either left or right. In this manner, a single input device is
21 able to control the movement of more than one telepresence device. The above example
22 illustrates that the present invention has the ability to allow one or more input devices to

1 control one or more telepresence devices. However, it is desirable to allow a particular
2 input device to control a variety of telepresence devices.

3 While it is possible for more than one input device to be active or used at a time, it
4 is preferable that only one input device be active. It is understood, that the telepresence
5 devices being controlled are typically related to those devices that permit an operator to
6 remotely view an operating environment and that the operator may simultaneously be
7 controlling a robot or other device. Thus, it is preferable that only one input device be
8 active for controlling the telepresence devices that allow the operators to view their
9 actions in the operating environment.

10 Because a single input device may not be capable of simultaneously controlling
11 all of the telepresence devices 60, configuration module 36 allows an operator to easily
12 change the particular telepresence devices 60 that are being controlled by a particular
13 device. The configuration module 36 defines a plurality of views and each view
14 corresponds to a particular set of devices. Typically, each view defines one input device
15 and the telepresence devices being controlled by that input device. After the views are
16 defined, the operator may switch to a particular view by issuing a verbal command that
17 the computer 30 may recognize, a keyboard command, or other command. When a
18 certain view is active, the selected input device may be used to control the designated
19 telepresence devices. It is understood that more than one view may be active, but only
20 one view is typically utilized because the operator can usually only interact with the
21 visual representation of the operating environment provided by one of the camera sets at a
22 time. If the video provided by another camera set is desired, the operator simply selects

another view, a process that is significantly simpler than continually repositioning a particular camera.

The following table describes an exemplary configuration module 36 having a plurality of views. The entries in the table correspond to the input devices 22 and telepresence devices 60 illustrated in Figure 2.

View Number	Included Devices
1	Headset 24, PTD 66, stereo camera set 62
2	Headset 24, PTD 68, zoom camera 64
3	Keyboard 30, PTD 68, zoom camera 64
4	Headset 24, robot 72, zoom camera 64

Typically, the cameras that may be present as telepresence devices are used to display either a stereo or a static visual representation of the operating environment and by selecting different views, an operator is able to see different aspects of the operating environment without having to move a particular camera. A telepresence system typically has a plurality of camera sets. Some of the camera sets provide stereo vision while others may only provide mono vision. The zoom camera 64 is preferably capable of providing two separate video signals that may be combined to produce stereo vision. Alternatively, the zoom camera 64 may also provide mono vision.

A significant advantage of configuration module 36 is that it may be easily modified to change, add, or remove views. Because the telepresence system as described herein is easily adaptable to any input device, new or different telepresence devices are

1 easily added and controlled. Further, additional input devices may also be added quickly
2 by simply modifying the configuration module 36. Thus, adding a new input device or a
3 telepresence device requires that the configuration module 36 be modified and that the
4 telepresence system be restarted such that the defined views are activated. In addition to
5 defining one or more views, the configuration module 36 may also be utilized to initialize
6 the various input and telepresence devices.

7 All system commands are also voice activated, Thus, the zones associated with a
8 particular input device may be calibrated or recalibrated, new views may be selected,
9 cameras can be easily moved to a home position, and other actions may be similarly
10 performed.

11 The present invention may be embodied in other specific forms without departing
12 from its spirit or essential characteristics. The described embodiments are to be
13 considered in all respects only as illustrative and not restrictive. The scope of the
14 invention is, therefore, indicated by the appended claims rather than by the foregoing
15 description. All changes which come within the meaning and range of equivalency of the
16 claims are to be embraced within their scope.

WE CLAIM:

1 1. A telepresence system for allowing an operator to interact with a remote
2 operating environment, the system comprising:

3 one or more input devices, wherein the one or more input devices
4 produce raw data representative of operator commands;

5 a computer for receiving the raw data, the computer processing the
6 raw data into a zone structure, wherein the zone structure is representative
7 of the operator commands and is compatible with one or more
8 telepresence devices; and

9 a communication link, wherein the operator commands in the zone
10 structure are received by the one or more telepresence devices over the
11 communication link such that the one or more input devices are configured
12 to control the one or more telepresence devices, wherein the telepresence
13 devices provide the operator with one or more visual representations of the
14 operating environment.

1 2. A system as defined in claim 1, wherein the one or more input devices
2 comprise one or more of: a headset, a keyboard, a mouse, and a joystick.

1 3. A system as defined in claim 1, wherein only one of the one or more input
2 devices is permitted to produce raw data at a time.

1 4. A system as defined in claim 1, wherein one of the one or more input
2 devices is capable of controlling a plurality of the one or more telepresence devices.

1 5. A system as defined in claim 1, wherein the communication link is a
2 wireless communication link.

1 6. A system as defined in claim 1, wherein the one or more telepresence
2 devices comprise one or more of a stereo camera set, a zoom camera, a pan and tilt
3 device, a slider bar, and a robot.

1 7. A system as defined in claim 6, wherein the pan and tilt device is
2 connected to the stereo camera set and is capable of orienting the stereo camera set.

1 8. A system as defined in claim 6, wherein the pan and tilt device is
2 connected to the zoom camera and is capable of orienting the zoom camera.

1 9. In a system having input devices and telepresence devices, a method for
2 controlling one or more identified telepresence devices with a selected input device, the
3 method comprising the steps of:

4 receiving raw data from the selected input device;

5 converting the raw data into a zone structure, wherein the zone
6 structure is representative of movement commands;

7 processing the zone structure with a device module for each
8 identified telepresence device to obtain the movement commands for each
9 identified telepresence device; and
10 transmitting the movement commands to the identified
11 telepresence devices.

1 10. A method as defined in claim 9, wherein the selected input device is one
2 of a headset, a keyboard, a mouse, or a joystick.

3
4 11. A method as defined in claim 9, wherein the zone structure is compatible
5 with the telepresence devices.

1 12. A method as defined in claim 9, wherein the zone structure is capable of
2 representing a plurality of speeds and directions.

3
1 13. A method as defined in claim 9, wherein the identified telepresence
2 devices only respond to portions of the zone structure that correspond to the axes of the
3 identified telepresence devices.

1 14. A method as defined in claim 9, wherein the raw data corresponds to
2 actions of an operator.

004049-0440

1 15. A method as defined in claim 9, further comprising the step of executing
2 the movement commands by the identified telepresence devices.

1 16. A computer readable medium having computer-executable instructions for
2 performing the steps recited in claim 9.

1 17. In a system having input devices and telepresence devices, a method for
2 configuring the system to provide one or more views, the method comprising the steps of:

3 for each of the one or more views:

4 selecting one or more telepresence devices;

5 selecting a single input device, wherein each of the
6 selected telepresence devices will be controlled by the
7 single input device;

8 storing the one or more views in a configuration module; and

9 configuring the system in accordance with the one or more views
10 defined in the configuration module.

1 18. A method as defined in claim 17, further comprising the step of executing
2 one of the views stored in the configuration module.

1 19. A method as defined in claim 17, further comprising the step of switching
2 to a different defined view.

1 20. A method as defined in claim 17, further comprising the step of editing the
2 configuration module to add, delete or change a view.

1 21. A method as defined in claim 17, wherein the configuration module is a
2 text file.

1 22. A method as defined in claim 17, further comprising the step of switching
2 to a different view in response to a voice command from an operator.

1 23. A computer-readable medium having computer-executable instructions for
2 performing the steps recited in claim 17.

1 24. A telepresence system for allowing an operator to interact with a remote
2 operating environment, the telepresence system comprising:

3 a plurality of input devices;

4 a plurality of telepresence devices, wherein one or more of the
5 telepresence devices is configured to be controlled by one of the plurality
6 of input devices and one or more of the telepresence devices is configured
7 to provide a visual representation of the operating environment;

8 a computer comprising:

9 an input conversion module, the input conversion
10 receiving raw data from at least one of the plurality of input
11 devices and converting the raw data to a zone structure; and
12 a plurality of device modules corresponding to the
13 plurality of telepresence devices, wherein the device
14 modules receive the zone structure and convert the zone
15 structure to movement commands for each respective
16 telepresence device; and
17 a communication link for transmitting the movement commands to
18 the telepresence devices.

1 25. A system as defined in claim 24, wherein the telepresence devices
2 comprises one or more stereo camera sets each connected with a different pan and tilt
device and a zoom camera connected with another pan and tilt device.

1 26. A system as defined in claim 25, wherein the zoom camera is capable of
2 providing stereo vision.

1 27. A system as defined in claim 24, wherein the raw data generated by the
2 input devices correspond to zones, each zone representative of movement in a particular
3 direction and speed.
4

5 28. A system as defined in claim 27, wherein the zone structure integrates any
6 of the input devices with one or more of the telepresence devices.

1 29. A system as defined in claim 24, wherein the computer further comprises a
2 configuration module.

1 30. A system as defined in claim 29, wherein the configuration module
2 comprises one or more views, wherein each view defines the one or more telepresence
3 devices controlled by a single input device.

1 31. A system as defined in claim 30, wherein the operator may select a
2 different view.


1 32. A system as defined in claim 29, wherein the one or more views stored in
2 the configuration module permits a single input device to control different groups of
3 telepresence devices.

1 33. A system as defined in claim 24, wherein the plurality of telepresence
2 devices provide the operator with a visual representation of the operating environment.

1 34. A system as defined in claim 33, wherein the visual representation
2 provides depth perception to the operator.

ABSTRACT

1 The present invention provides a modular, flexible system for deploying multiple
2 video perception technologies. The telepresence system of the present invention is
3 capable of allowing an operator to control multiple mono and stereo video inputs in a
4 hands-free manner. The raw data generated by the input devices is processed into a
5 common zone structure that corresponds to the commands of the user, and the commands
6 represented by the zone structure are transmitted to the appropriate device. This
7 modularized approach permits input devices to be easily interfaced with various
8 telepresence devices. Additionally, new input devices and telepresence devices are easily
9 added to the system and are frequently interchangeable. The present invention also
10 provides a modular configuration component that allows an operator to define a plurality
11 of views each of which defines the telepresence devices to be controlled by a particular
12 input device. The present invention provides a modular flexible system for providing
13 telepresence for a wide range of applications. The modularization of the software
14 components combined with the generalized zone concept allows the systems and methods
15 of the present invention to be easily expanded to encompass new devices and new uses.
16

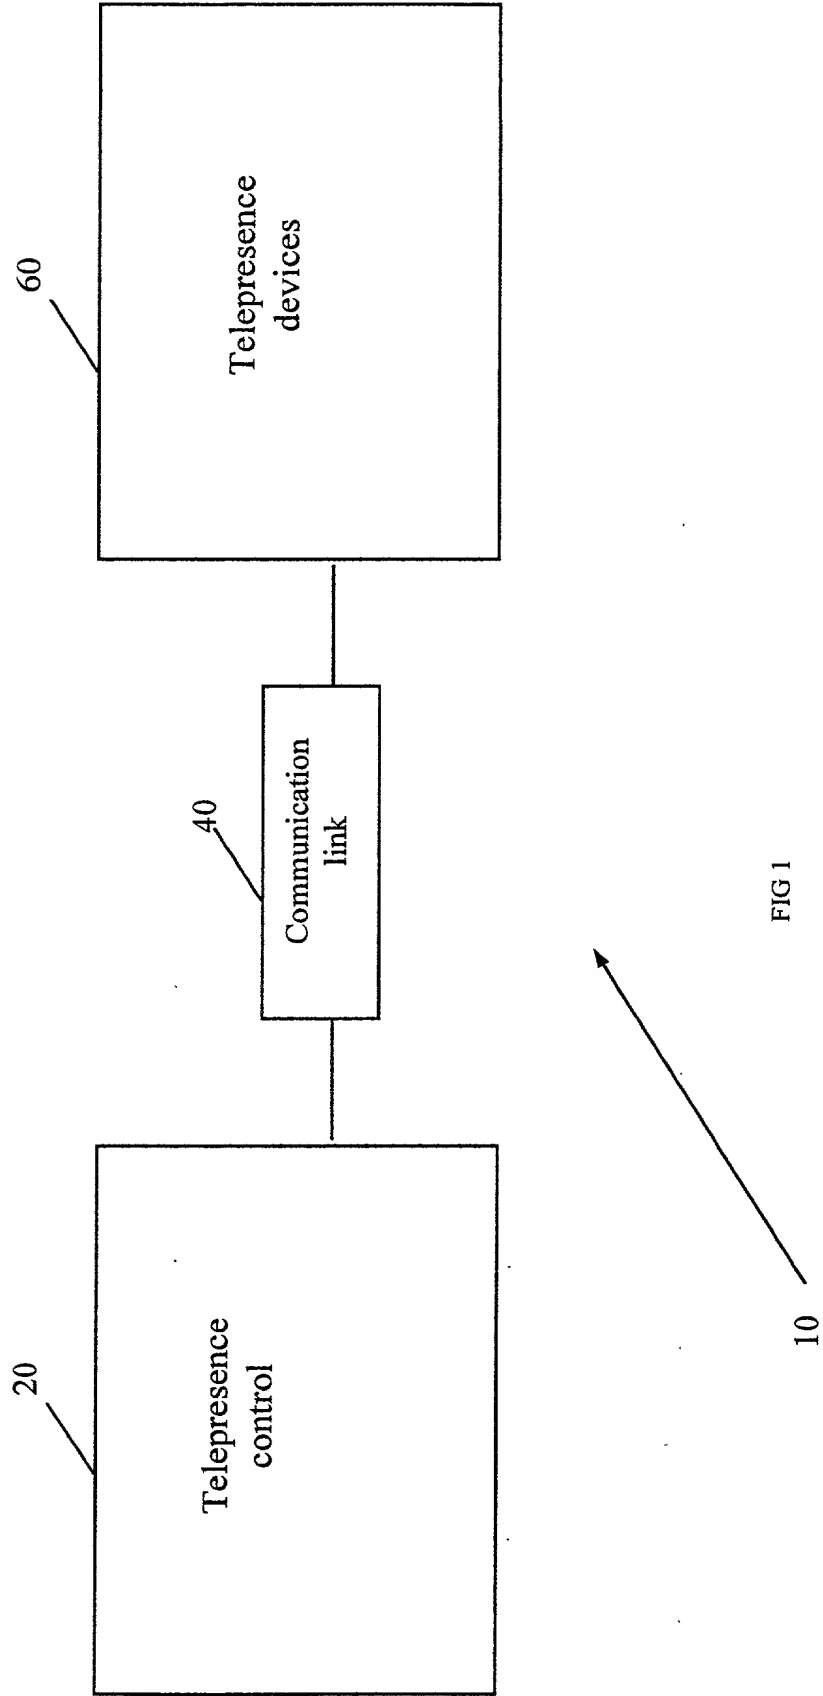

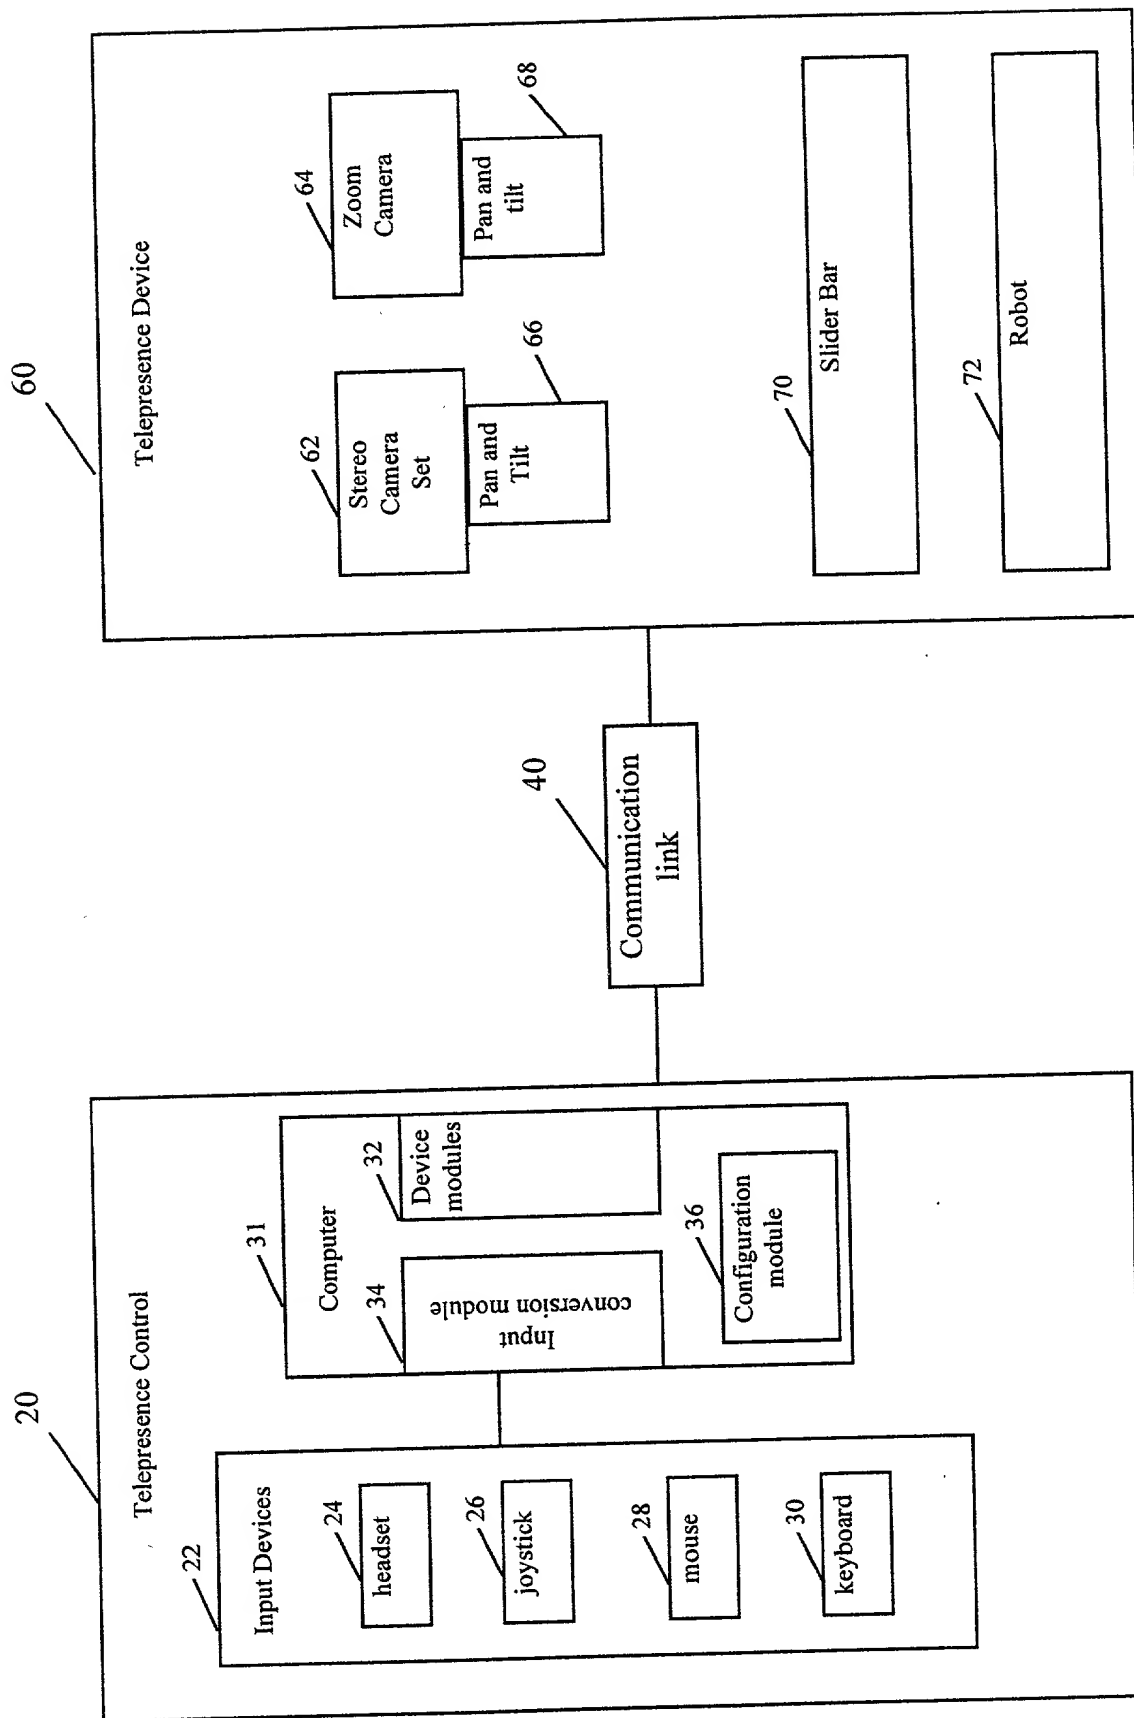


FIG 2

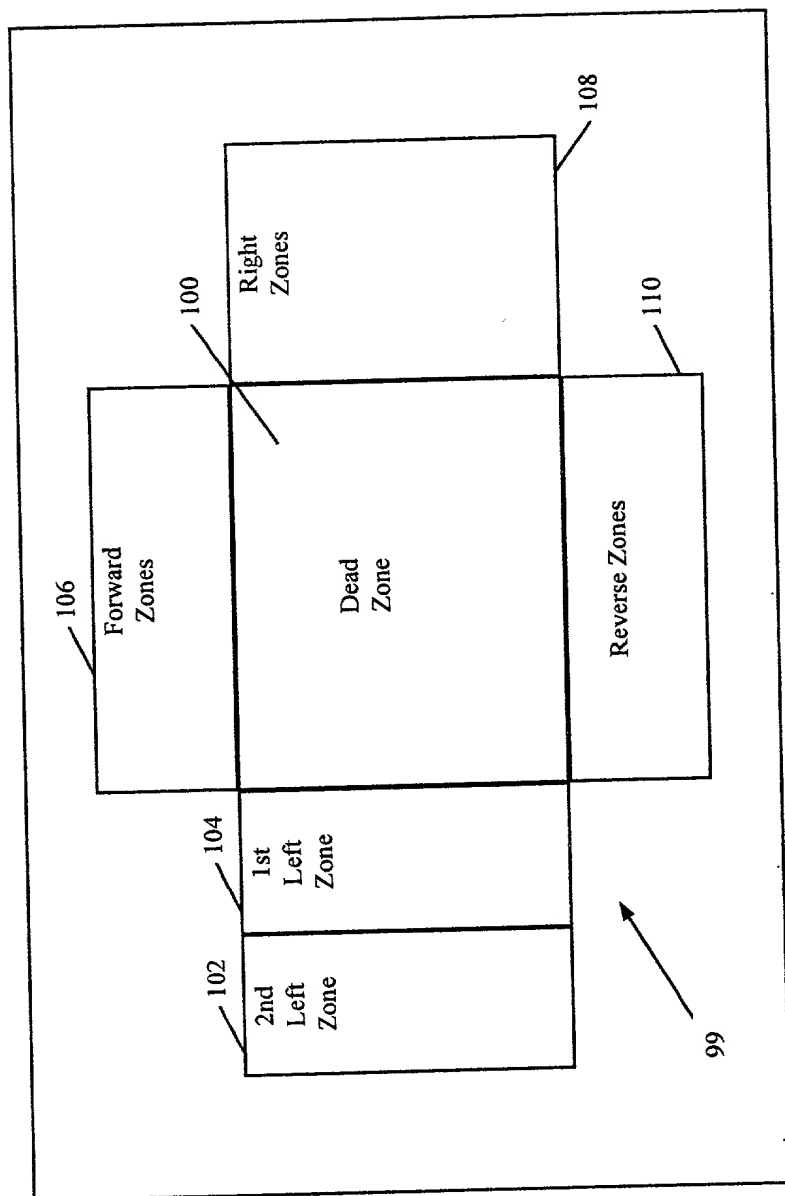


FIG 3

Express Mail # EI568916213US
Attorney's Docket No. LIT-PI-499

COMBINED DECLARATION AND POWER OF ATTORNEY

(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL, DIVISIONAL
CONTINUATION OR CIP)

As a below named inventor, I hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type: (check one applicable item below)

- ☒ original ☐ design ☐ supplemental
☐ national stage of PCT
☐ divisional ☐ continuation ☐ continuation-in-part (CIP)

INVENTORSHIP IDENTIFICATION

My residence post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

SYSTEMS AND METHODS FOR IMPROVED TELEPRESENCE

SPECIFICATION IDENTIFICATION

the specification of which: (complete (a), (b) or (c))

- (a) ☒ is attached hereto.
(b) ☐ was filed on _____ as Serial No. 09/_____; or
 ☐ Express Mail No. _____, as Serial No., not yet known;
 and was amended on _____ (if applicable).
(c) ☐ was described and claimed in PCT International Application No. _____ filed on
 _____ and as amended under PCT Article 19 on _____ (if any).

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations. Section 1.56(a).

☐ In compliance with this duty there is attached an information disclosure statement.

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(d) ☒ no such applications have been filed.

(e) ☐ such applications have been filed as follows:

NOTE: where item (c) is entered above and the International Application which designated the U.S. claimed priority check item (e), enter the details and make the priority claim.

EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119
			<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>
			<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>
			<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>
			<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>
			<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/>

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number.)

W. Gary Goodson
Reg. No. 22,387

(check the following item, if applicable)

☐ Attached as part of this declaration and power of attorney is the authorization of the above-named attorney(s) to accept and follow instructions from my representative(s).

SEND CORRESPONDENCE TO:

DIRECT TELEPHONE CALLS TO:

W. Gary Goodson
Bechtel BWXT Idaho, LLC
P. O. Box 1625
Idaho Falls, ID 83415-3899
(208) 526-9469

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURE(S)

Matthew O. Anderson

Full Name of Sole or First Inventor



Inventor's Signature

Date

4/4/2000

Idaho Falls, Idaho

Residence Address (City, State or Foreign Country)

U.S.

Citizenship


2345 Bodily, Idaho Falls, ID 83401

Post Office Address (Street, City, State, Zip Code)



W. David Willis

Full Name of Second Joint Inventor, if any



Inventor's Signature

Date

4/4/2000

Idaho Falls, Idaho

Residence Address (City, State or Foreign Country)

U.S.

Citizenship

6133 E. Sunnyside Road, Idaho Falls, ID 83406

Post Office Address (Street, City, State, Zip Code)



Robert A. Kinoshita

Full Name of Third Joint Inventor, if any

Inventor's Signature

Date

4/4/2000

Idaho Falls, Idaho

Residence Address (City, State or Foreign Country)

U.S.

Citizenship

1962 Henryanna Ave. Idaho Falls, ID 83404

770 Reed Avenue, Idaho Falls, ID 83404

Post Office Address (Street, City, State, Zip Code)